

PERFORMANCE @ 208 & 230V

°F %RH	80 60	75 50
Water Removal (P/Day)	345	221
Efficiency (P/kWh)	8.5	6.0
Energy Factor (L/kWh)	4.0	2.8

ELECTRICAL


°F %RH	80 60	80 60
Supply Voltage	230V	208V
Current Draw	7.6A	8.4A
MCA*	15A	15A
MOP*	20A	20A
Recommended Breaker Size	15A	15A
Power	1,700W	
Power Cord	NEMA 6-15P	
CFM	900	
BTU (Total)	21,500	
BTU (Motor Load)	5,800	
BTU (Heat of Condensation)	15,700	

SPECS

Control Type	Digital Onboard or External
Refrigerant Type	R454b
Refrigerant Amount	3 lb 8 oz
Weight	215 lb
Air Filter MERV Rating	MERV-13
Dimensions	20" x 22" x 2"
Drain Port Connection	3/4 Threaded NPT
Operating Temperature	56 F Min - 95 F Max



DIMENSIONS

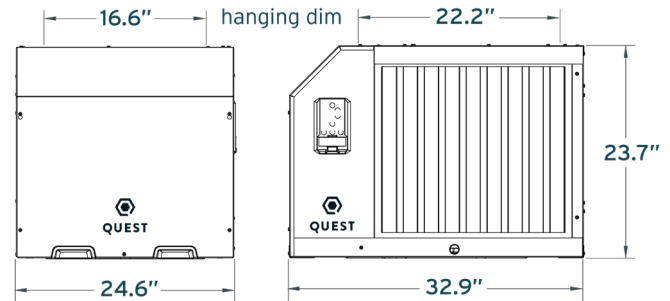

FEATURES

- + **Patented M-CoRR™ Technology:** multi-coil design achieves highest efficiencies available in the market
- + **Digital Onboard Control:** easy operation of your machine, with optional external control
- + **Superior MERV-13 Filtration:** removes more harmful contaminants from the air, such as mold, bacteria, and some viruses
- + **Integrated Lift and Hang Points:** allow for easy movement and flexible installation
- + **Easy Access Panel:** removable panel for easier in-place maintenance and serviceability

Specifications are subject to change without notice. Drawings are not to scale. *See manual for details on MCA/MOP.