

## PERFORMANCE

°F   %RH	<b>80   60</b>	<b>75   50</b>
Water Removal (P/Day)	500	320
Efficiency (P/kWh)	9.2	6.8
Energy Factor (L/kWh)	4.4	3.2

## ELECTRICAL


°F   %RH	<b>80   60</b>
Supply Voltage	277V
Current Draw	8.2A
MCA*	15A
MOP*	25A
Recommended Breaker Size	25A
Power	2,250W
Power Cord	12/3, SJTW, 20A (6')
Plug	NEMA-L7-20P
CFM	1,150
BTU (Total)	30,500
BTU (Heat of Condensation)	22,800
BTU (Motor Load)	7,700

## SPECS

Control Type	External control required (not provided)
Refrigerant Type	R454b
Refrigerant Amount	3 lb 14 oz
Weight	275 lb
Air Filter MERV Rating	MERV-13
Dimensions	18" x 20" x 2"
Drain Port Connection	3/4" Threaded NPT
Operating Temperature	56 F Min-95 F Max



## DIMENSIONS

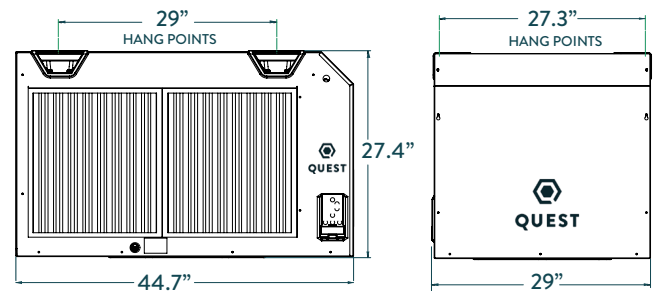

## FEATURES

- + **Patented M-CoRR™ Technology:** multi-coil design achieves highest efficiency available in its class
- + **Superior MERV-13 Filtration:** removes more harmful contaminants from the air, such as mold, bacteria and some viruses; 20% more effective than MERV-11
- + **Integrated Lift and Hang Points:** allows for overhead installation, no hang kit required
- + **Lowest Amp Draw:** freeing up electricity for other equipment
- + **Auto-Restart:** resets to previous settings after loss of power

Specifications are subject to change without notice. Drawings are not to scale. \*See manual for details on MCA/MOP.