



700 50HZ | PN 4046320-XX

PERFORMANCE

°C %RH	26.7 60	23.9 50
Water Removal (L/Day)	331	227
Efficiency (P/kWh)	8.2	6.1
Energy Factor (L/kWh)	3.9	2.9

ELECTRICAL


°C %RH	26.7 60
Supply Voltage	400V, 3-Phase
Current Draw	5.8A
MCA*	15A
MOP*	15A
Recommended Breaker Size	10A (EU, AUS, ZA) 13A (UK)
Power	4,800W
Power Cord	Hardwire only, no cord
CFM	1,650
BTU (Total)	45,700
BTU (Heat of Condensation)	33,200
BTU (Motor Load)	12,500

SPECS

Control Type	Onboard Digital Control (with option for external control)
Refrigerant Type	R454b
Refrigerant Amount	104 oz (2.9 kg)
Weight	136 kg
Air Filter MERV Rating	MERV-13
Filter Dimensions	45.7 x 50.8 x 5.1 cm
Drain Port Connection	3/4" Threaded NPT
Operating Temperature	13.3 °C Min - 35 °C Max



DIMENSIONS

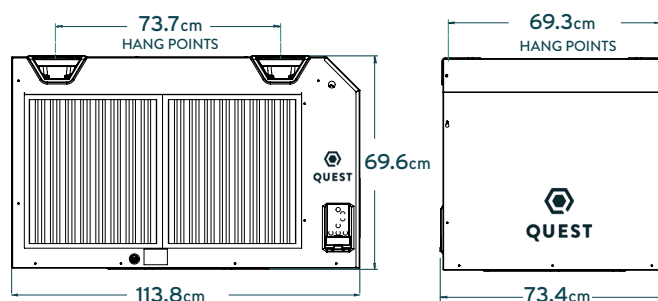

FEATURES

- + **Patented M-CoRR™ Technology:** unique multi-coil design achieves highest efficiency available in its class
- + **Superior MERV-13 Filtration:** removes more harmful contaminants from the air, such as mold, bacteria, and some viruses; 20% more effective than MERV-11
- + **Integrated Lift and Hang Points:** allows for easier movement and flexible installation
- + **Lowest Amp Draw:** freeing up electricity for other equipment
- + **Onboard Digital Controls:** enables easy and precise setpoints with self diagnostics

Specifications are subject to change without notice. Drawings are not to scale. *See manual for details on MCA/MOP.

QUESTCLIMATE.COM / (877) 420-1330

