

SPECIFICATIONS

Capacity⁽¹⁾ (water removal)	210 ppd
Energy factor⁽¹⁾ (efficiency)	2.8 L/kWh (6.0 pints/kWh)
BTU/h⁽²⁾	14,850
Voltage, Phase, Frequency	208/240VAC, 1 Phase, 60 Hz
Current draw⁽¹⁾	5.7 Amps
Power (Watts)⁽¹⁾	1,400
Min. circuit ampacity⁽³⁾	13A
Max. overcurrent protection⁽⁴⁾	20A
Dimensions: (cabinet only)⁽⁵⁾	Width: 28½" Height: 18¾" Length: 22½"
Weight	140 lbs.

⁽¹⁾Rated capacity and energy factor test done and current draw measured in accordance with AHAM DH-1 2008 at 80°F/60% RH inlet air at 0.0 ESP. ⁽²⁾BTU@80°F/60% RH, sensible BTU/h output. ⁽³⁾Use when selecting wire size and type. ⁽⁴⁾Use when sizing the breaker or fuse. ⁽⁵⁾Filter rack adds 3¾".

Note: All specifications are at 240VAC only, except minimum circuit ampacity and maximum overcurrent protection.

FEATURES

Control	Model A76 included
Air supply orientation	In-line, top, bottom, side, any combination
Filter	MERV 11 disposable
Refrigerant	R410A
Coil type	Modine® coil with ElectroFin® E-coat
Power cord	Hardwired
Drain connection*	¾" NPT female bottom connection
Leveling feet	Included
Hanging brackets for threaded rod	Included
Hanging bolts for cable	Included
Warranty	5 Years on all parts including refrigeration system

* Requires drain trap

INCLUDED ITEMS

10 ft. Power cord with strain relief	14/3, 15-Amp, 6-15P plug
Drain fittings	90°, ¾" MNPT x ¾" FNPT and ¾" MNPT x ¾" barbed
10 ft. Drain tubing	¾" ID
Control	Model A76
30' Thermostat cable	20 gauge/3 conductor
Manual	Installation instructions





PRINCIPLE OF OPERATION

The Anden Model A200V1 Dehumidifier is designed to dehumidify the air coming into the unit by passing the incoming air over an evaporator coil to drop the air temperature below the dew point of the air. Moisture is removed from the air and drained out of the unit to a common floor or waste drain. The air is then reheated in the condenser coil and exits the unit.

Dehumidification occurs until the set point is reached, then shuts off until the control determines a need for operation.

APPLICATION

The Anden Model A200V1 Dehumidifier is the perfect solution for the precise management of humidity required in an indoor growing environment.

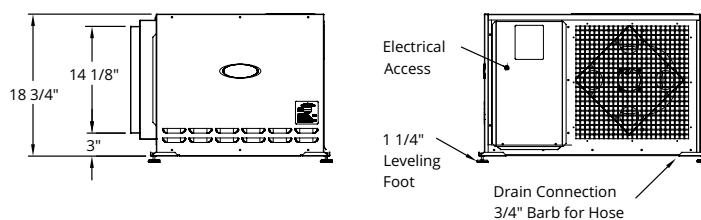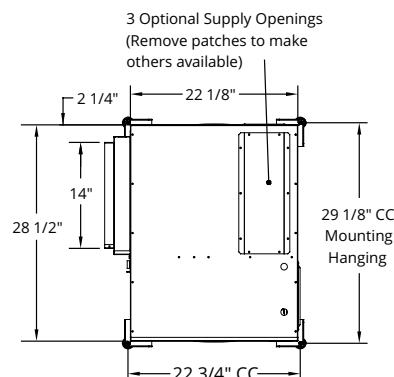


Installation Options for the Anden A200V1 Dehumidifier

APPLICATIONS


Freestanding

- Air is pulled into the dehumidifier directly from the space, dehumidified and returned to the space.



Suspended

- Air is pulled into the dehumidifier directly from the space, dehumidified and returned to the space.
- The dehumidifier is hung from the ceiling to save space in the facility.



Optional Controls and Sensors

Wi-Fi Thermostats



Wi-Fi thermostats and mobile app provide humidity and temperature alerts directly to your smart phone or tablet. Control and monitor climate conditions in your grow room 24/7/365 from anywhere.



Wi-Fi Model 8840

Easy-to-use color touch screen with all control options on the home screen.



Wi-Fi Model 8830

Easy-to-use touch screen with all control options on the home screen.



Wi-Fi Model 8820

Easy-to-use touch screen designed for temperature and humidity control.

Sensor



Model 8082 Sensor

Monitor temperature and humidity in multiple locations. Readings averaged to balance temperature and humidity.



Model 8083 Sensor

Flush temperature and RH module. Averages four temperature and four RH values.

Included Controls



Model A76

Dedicated monitoring and control of each dehumidifier at canopy height.

MODEL A76 SPECIFICATIONS

Electrical

Input voltage and current

Voltage: 24VAC +/-20% Current: 25mA (nominal), 50mA (max.) at 24VAC

Output

Dry contact, normally open

Control

Control range

40%–80% RH

Accuracy

+/-5% RH

Differential

3% RH

Low limit

40°F dew point

High limit

99°F dry bulb