


QUEST 225 208/230V | PN 4042800

PERFORMANCE

°F %RH	80 60	75 50
Water Removal (P/Day)	225	159
Efficiency (P/kWh)	8.2	6.1
Energy Factor (L/kWh)	3.9	2.9

ELECTRICAL


°F %RH	80 60	80 60
Supply Voltage	230V	208V
Current Draw	5.3A	5.6A
MCA*	8A	
MOP*	15A	
Recommended Breaker Size	15A	
Power	1,150W	
Power Cord	NEMA 6-15P, 10'	
CFM	650	
BTU (Total)	14,155	
BTU (Motor Load)	3,855	
BTU (Heat of Condensation)	10,300	

SPECS

Control Type	Digital Onboard or External
Refrigerant Type	R410a
Refrigerant Amount	3 lb 12 oz
Weight	130 lb
Air Filter MERV Rating	MERV-13
Dimensions	18" x 18" x 2"
Drain Port Connection	3/4" Threaded NPT
Operating Temperature	56 F Min - 95 F Max



DIMENSIONS

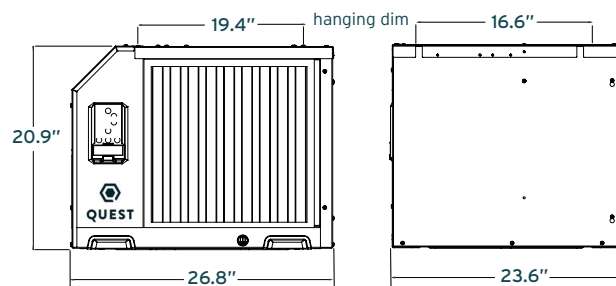

FEATURES

- + **Patented M-CoRR Technology:** Achieves the highest efficiency available in the market
- + **Onboard digital control,** with terminal block for optional external control
- + **Superior MERV-13 Filtration:** Removes more harmful contaminants from the air, such as mold, bacteria, and virus carriers
- + **Integrated Lift and Hang Points** for easy, flexible installation
- + **Removable Access Panel** for effortless in-place maintenance and serviceability
- + **Auto-Restart** in the event of power outage

Specifications are subject to change without notice. Drawings are not to scale. *See manual for details on MCA/MOP.

QUESTCLIMATE.COM / (877) 420-1330

