

PERFORMANCE

°F %RH	80 60	75 50
Water Removal (P/Day)	225	143
Efficiency (P/kWh)	6.1	4.4
Energy Factor (L/kWh)	3.0	2.1

ELECTRICAL


°F %RH	80 60
Supply Voltage	220-240V, 60Hz
Current Draw	6.9A
MCA*	10A
MOP*	15A
Recommended Breaker Size	15A
Power	1500W
Power Cord	NEMA 6-15p
CFM	526 @ 0.0" WG
BTU (Total)	15,500
BTU (Heat of Condensation)	10,300
BTU (Motor Load)	5,200

SPECS

Control Type	Onboard
Refrigerant Type	R410a
Refrigerant Amount	2 lb 0 oz
Weight	160 lb
Air Filter MERV Rating	MERV-11
Dimensions	16" x 20" x 2"
Drain Port Connection	3/4" Threaded NPT
Operating Temperature	56 F Min - 95 F Max



DIMENSIONS

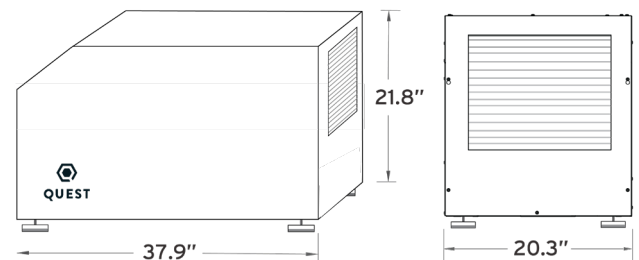

FEATURES

- + **MERV-11 Filtration:** Removes harmful contaminants from the air, such as dust, mold, and pollen, helping to prevent cross-contamination
- + **Onboard controls** with low voltage terminal block for optional external control
- + **Low amp draw**, freeing up electricity for other equipment
- + **Auto-restart** to previous settings after loss of power
- + **Long power cord** for extended reach

Specifications are subject to change without notice. Drawings are not to scale. *See manual for details on MCA/MOP. * Requires buck/boost transformer to run on 208V or 277V.