

PERFORMANCE

°F %RH	80 60	75 50
Water Removal (P/Day)	225	130
Efficiency (P/kWh)	7.6	4.7
Energy Factor (L/kWh)	3.6	2.2

ELECTRICAL


°F %RH	80 60	80 60
Supply Voltage	208V	230V
Current Draw	6.1A	5.5A
MCA*	15A	
MOP*	15A	
Recommended Breaker Size	15A	
Power	1230W	
Power Cord	NEMA 6-15P, 9'	
CFM	630	
BTU (Total)	14,400	
BTU (Motor Load)	4,200	
BTU (Heat of Condensation)	10,200	

SPECS

Control Type	Digital Onboard or External
Refrigerant Type	R454B
Refrigerant Amount	3 lb 4 oz
Weight	130 lb
Air Filter MERV Rating	MERV-13
Dimensions	18" x 18" x 2"
Drain Port Connection	3/4 Threaded NPT
Operating Temperature	56 F Min - 95 F Max



DIMENSIONS

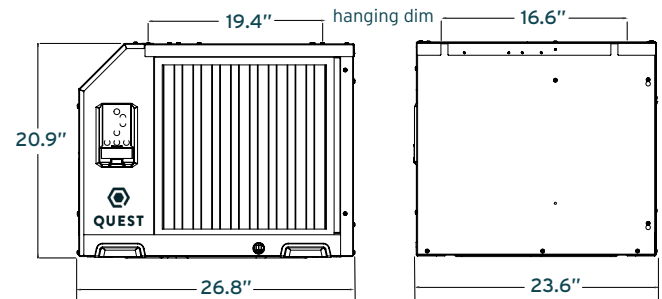

FEATURES

- + **Patented M-CoRR™ Technology:** multi-coil design achieves highest efficiencies available in the market
- + **Digital Onboard Control:** easy operation of your machine, with optional external control
- + **Superior MERV-13 Filtration:** removes more harmful contaminants from the air, such as mold, bacteria and some viruses
- + **Integrated Lift and Hang Points:** allow for easy movement and flexible installation
- + **Easy Access Panel:** removable panel for easier in-place maintenance and serviceability

Specifications are subject to change without notice. Drawings are not to scale. *See manual for details on MCA/MOP.