

PERFORMANCE


°F %RH	80 60	75 50
Water Removal (P/Day)	746	530
Efficiency (P/kWh)	7.3	5.0
Energy Factor (L/kWh)	3.5	2.4

ELECTRICAL


°F %RH	80 60
Supply Voltage	480V - 3 phase
Current Draw	6.5A
MCA*	10A
MOP*	15A
Recommended Breaker Size	10A
Power	4,300W
Power Cord	Hardwire, no cord
CFM	1,750
BTU (Total)	48,400
BTU (Heat of Condensation)	33,900
BTU (Motor Load)	14,500

SPECS

Control Type	External control required (not provided)
Refrigerant Type	R410a
Refrigerant Amount	6 lb 4 oz
Weight	340 lb
Air Filter MERV Rating	MERV-13
Dimensions	18" x 20" x 2"
Drain Port Connection	3/4" Threaded NPT
Operating Temperature	56 F Min-95 F Max

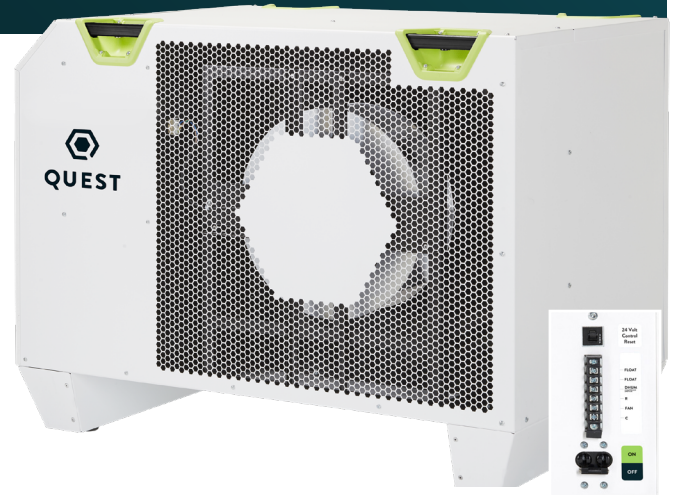

DIMENSIONS

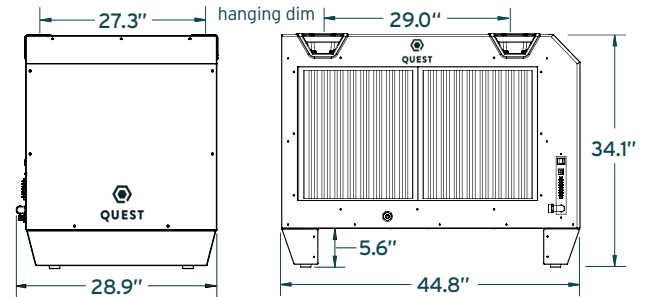

FEATURES

- + **Patented M-CoRR Technology:** Achieves the highest efficiency in its class
- + **Superior MERV-13 Filtration:** Removes harmful contaminants from the air, such as mold, bacteria and some viruses
- + **Integrated Hang Points** and handles allows for easier movement and flexible installation
- + **Low Amp Draw**, putting less load on the grid and freeing up electricity for other equipment
- + **Auto-Restart** to previous settings after loss of power

Specifications are subject to change without notice. Drawings are not to scale. *See manual for details on MCA/MOP.